




ISO BEARING-SINGAPORE (PTE)LTD.

200 mm x 310 mm x 51 mm NSK NU1040
cylindrical roller bearings

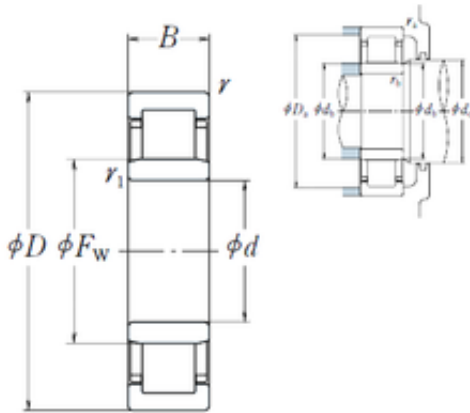

Bearing No. NU1040

Bore Diameter	200 mm
Outer Diameter	281 mm
d	200 mm
Fw	229 mm
D	310 mm
Ew	281 mm
B	51 mm
C	51 mm
r min.	2,1 mm
r1 min.	2,1 mm
da min.	211 mm
ra max.	2 mm
rb max.	2 mm
Weight	14 Kg
Basic dynamic load rating (C)	390 kN
Basic static load rating (C0)	580 kN
(Grease) Lubrication Speed	2 000 r/min
hidYobi	NU1040
LangID	1
D_	310
B_	51
hidTable	ecat_NSCLDR
Oil rpm	2400
rb	2
mass	14

NU1040 Bearing 2D drawings and 3D CAD models



ISO BEARING-SINGAPORE (PTE)LTD.

GRS rpm	2000
ra	2
db max	226
TSR rpm	2600
C0	580
DE_	281
Prod_Type3	CRB_SR_NU
da	211
DA_	26
Z_	24
D_a max	299
yobi	NU1040
C_conv	390000
ALPHA_	0
SDM_	255
r	2.1
db min	211
dc min	233
KBRG	4144
SBRG	10
r1	2.1
DI_	229