




ISO BEARING-SINGAPORE (PTE)LTD.

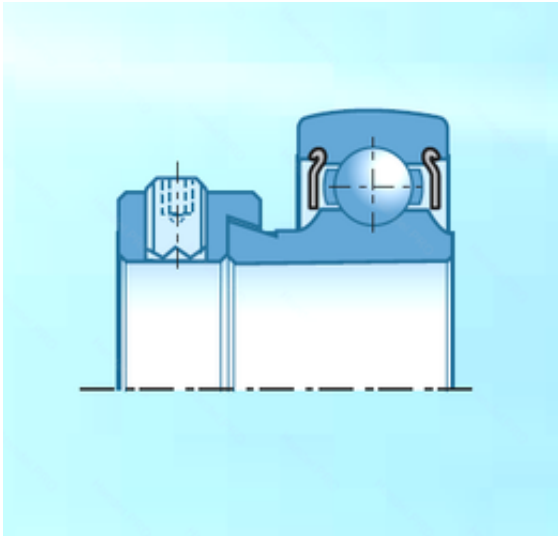

AEL207D1 Bearing 2D drawings and 3D CAD models

35,000 mm x 72,000 mm x 25,4 mm NTN
AEL207D1 deep groove ball bearings

Bearing No. AEL207D1

Size	35x72x25.4 mm
Bore Diameter	35,000 mm
Outer Diameter	72,000 mm
Width	25,4 mm
d	35,000 mm
D	72,000 mm
B	25,4 mm
B1	38,9 mm
C	17,000 mm
Category	Insert Bearings Spherical OD
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.5
Product Group	M06110
Inner Race Profile	Narrow Inner Ring
Outer Race Profile	Spherical
Relubricatable	Yes
Seal Type	Single Lip Contour Riding
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Snap Ring	No
Long Description	35MM Bore; Narrow Inner Ring; Ball Bearing; 38.9MM Length Thru Bore; 17MM Outer Race Width; 72MM



ISO BEARING-SINGAPORE (PTE)LTD.

	Outside Diameter; Relubricatable; Single Lip Contour Riding Seal; Eccentric Collar Mounting Method; No
Inch - Metric	Metric
Other Features	Single Row Light Duty Steel Cage With Set Screw Has Trash Guard Metric
Category	Insert Bearings
UNSPSC	31171536
Harmonized Tariff Code	8482.10.50.00
Noun	Bearing
Keyword String	Insert
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	AEL207D1
Weight / LBS	1.102
Outer Race Width	0.669 Inch 17 Millimeter
Bore	1.378 Inch 35 Millimeter
Length Thru Bore	1.531 Inch 38.9 Millimeter
Outside Diameter	2.835 Inch 72 Millimeter
bore diameter:	35 mm
fillet radius:	1.5 mm
outside diameter:	72 mm
radial dynamic load capacity:	25700 N
outer ring width:	17 mm
radial static load capacity:	15300 N
inner ring width:	25.4 mm
bearing material:	Through Hardened Steel
bore type:	Round
finish/coating:	Uncoated
locking device:	Eccentric Collar
maximum rpm:	4200 RPM



ISO BEARING-SINGAPORE (PTE)LTD.

duty type:	Standard Duty
seal type:	Contact
overall width:	38.90 mm
series:	AEL2
operating temperature range:	-40 to 120 ° C
manufacturer product page:	Click here